

ANCHOR **PRO**

Vivid In-ceiling Screen

ANIVTES-SERIES

VIVID i TENSIONED



Solid structure - Handsome white powder coated case presents a solid structure and clean look.

Easy installation - Specially designed brackets make it easy to install in all kinds of ceilings.

Designed to have the screen installed during the "rough-in" stages or the finished stages.

Motor in roller design - Special motor in roller design keeps a quiet and smooth operation.



Unique roller design ensure the flattest screen surface.

Large diameter rollers ensure a long-term screen integrity and a consistent flat projection surface.


Equipped with standard 3 button in-line switch All of Anchor Pro control systems are available for this model screen

Screen Selection - HD Cinema, High Contrast Pure-Mat, Acousion Classic A, Acousion Classic C, HD Rear, HD130, 3D Optical

Motor mounted on rubber isolation insulators. Motor options are 110Volts 60Hz (UL certified), and 220-2300 VAC, 50 Hz, with three wire connectivity for instant reversibility and lifetime lubricated with pre-set accessible limit switches. Tensioned tabs ensure image quality and Matte White PVC coated on Fiber Glass, Flame retardant and mildew resistant.

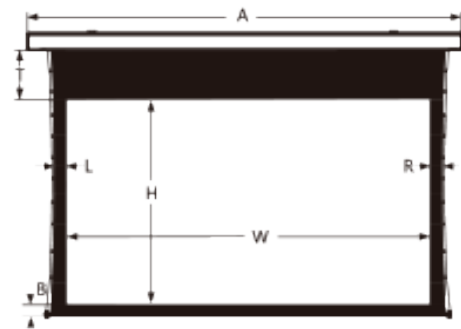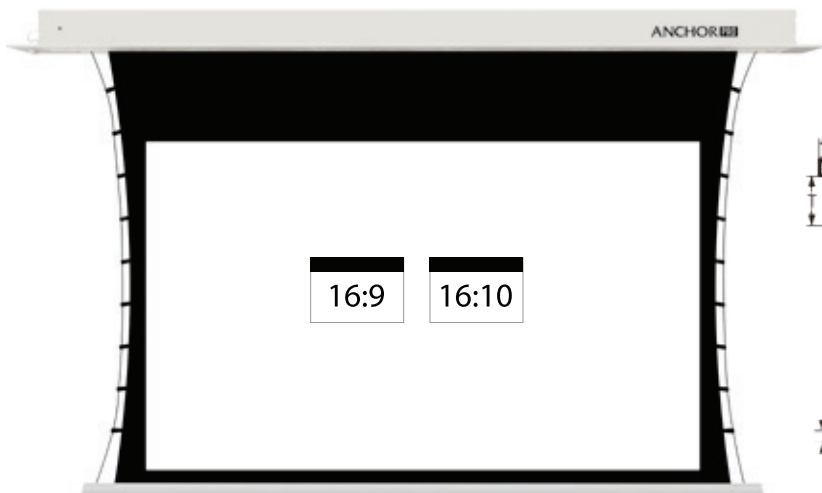

Format	Spec	Viewing area (mm)			Black drop (mm)			Format	Spec	Viewing area (mm)			Black drop (mm)			Installation
		W	H	T	B	L/R	W			H	T	B	L/R			
16:9	109"	2413	1357	400	100	130	16:10	77"	1704	1065	400	100	130			
	120"	2656	1494	400	100	130		93"	2030	1268	400	100	130			
	135"	2989	1681	400	100	130		103"	2214	1384	400	100	130			
	106"	2340	1320	400	100	130		109"	2340	1462	400	100	130			
	119"	2634	1482	400	100	130		123"	2656	1660	400	100	130			
	133"	2944	1656	400	100	130		136"	3048	1905	400	100	130			
	150"	3320	1868	400	100	130		164"	3532	2208	400	100	130			

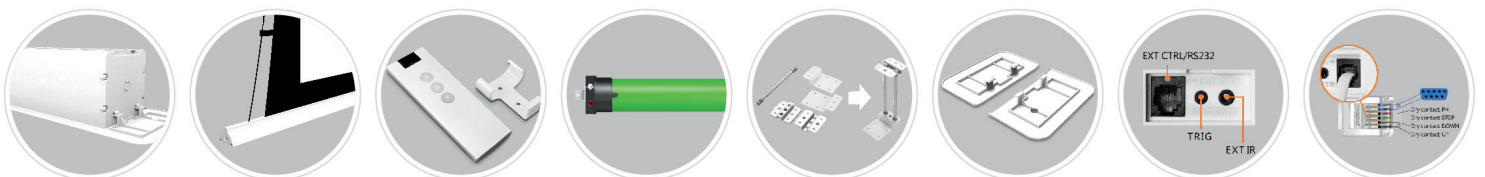

Case

Bottom Bar

Controller

Quiet Motor

Brackets

Cover Plates

Smart Control Jack

RS232 or Central Control